




A5

| | |
|--------------------------------|---------------------------|
| FUNCTION | Indicator light A1 series |
| AMBIENT TEMPERATURE | 125 °C |
| GWT | 850 °C |
| GWT NO FLAME (<2sec) | 650 °C |




A 5

DRAWING

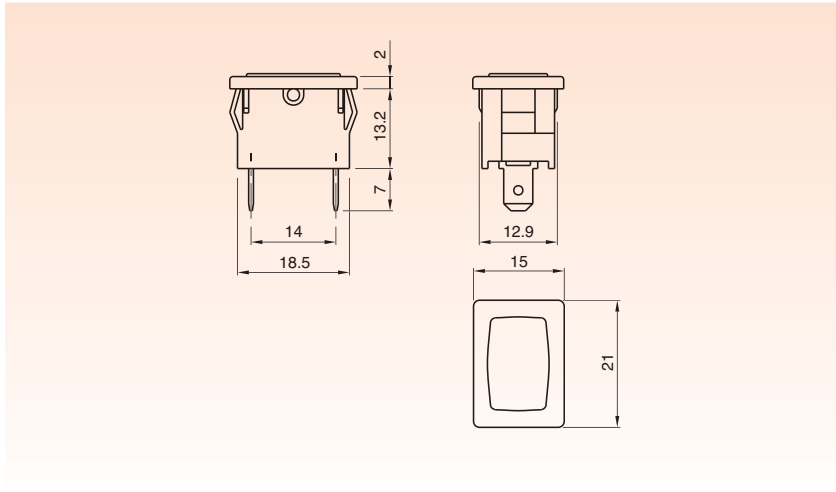

?

TERMINAL

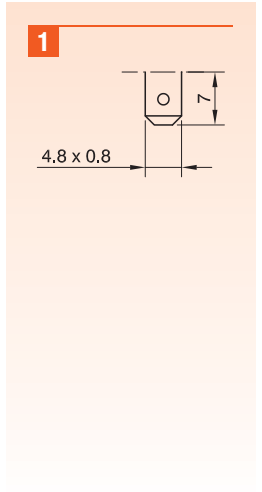


A7

| | |
|--------------------------------|---------------------------|
| FUNCTION | Indicator light A4 series |
| AMBIENT TEMPERATURE | 125 °C |
| GWT | 850 °C |
| GWT NO FLAME (<2sec) | 650 °C |




A 7


DRAWING

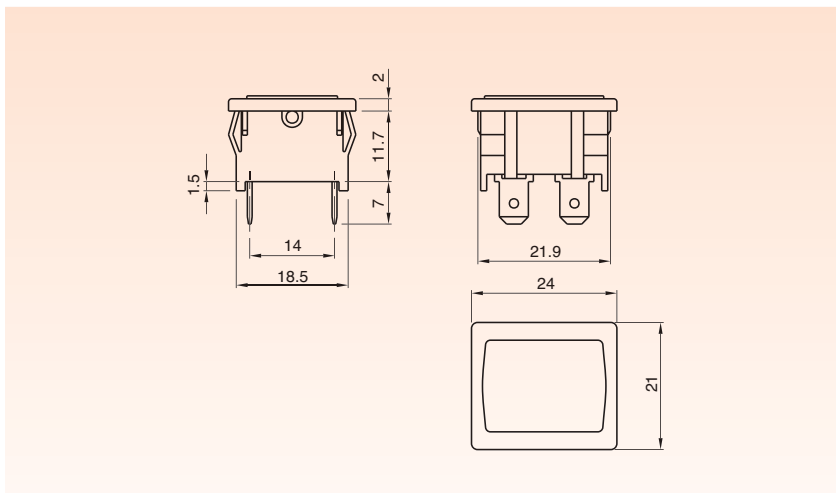

?

TERMINAL

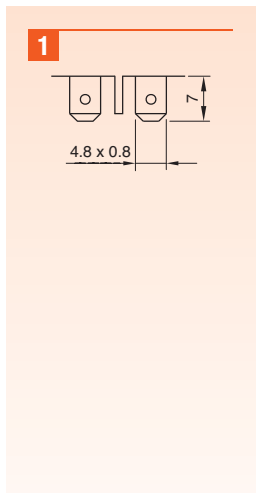



| Z | Y | X |
|--------------|-----------|-----------|
| 0,7 ... 1,25 | 13,0 ±0,1 | 19,0 ±0,2 |
| 1,25 ... 2,0 | 13,0 ±0,1 | 19,3 ±0,2 |
| 2,0 ... 3,0 | 13,0 ±0,1 | 19,6 ±0,2 |

| TERMINAL | FUNCTION | RATING | BODY COLOR | LENS COLOR | | | | | |
|----------|----------|--------|------------|------------|---|---|---|---|---|
| A | 5 | | | | 0 | 0 | 0 | 0 | 0 |

| ? | ? | ? | ? | 0 | 0 | 0 | 0 | 0 |
|---|---|---|---|---|---|---|---|---|
|---|---|---|---|---|---|---|---|---|

FUNCTION

1

1a 1b

RATING

2

200 - 250 VAC
T125 °C
VDE 710

200 - 250 VAC
T65 °C
UL 496
CSA C22.2

BODY COLOR

1 black

X ? custom

LENS COLOR


ILLUMINATED ✨

G red

H orange

E green

X ? custom



| Z | Y | X |
|--------------|-----------|-----------|
| 0,7 ... 1,25 | 22,0 ±0,1 | 19,0 ±0,2 |
| 1,25 ... 2,0 | 22,0 ±0,1 | 19,3 ±0,2 |
| 2,0 ... 3,0 | 22,0 ±0,1 | 19,6 ±0,2 |

| TERMINAL | FUNCTION | RATING | BODY COLOR | LENS COLOR | | | | | |
|----------|----------|--------|------------|------------|---|---|---|---|---|
| A | 7 | | | | 0 | 0 | 0 | 0 | 0 |

| ? | ? | ? | ? | 0 | 0 | 0 | 0 | 0 |
|---|---|---|---|---|---|---|---|---|
|---|---|---|---|---|---|---|---|---|

FUNCTION

1

1a 2b

RATING

2

200 - 250 VAC
T125 °C
VDE 710

200 - 250 VAC
T65 °C
UL 496
CSA C22.2

BODY COLOR

1 black

X ? custom

LENS COLOR

ILLUMINATED ✨

G red

H orange

E green

X ? custom